


Engage. Motivate. Inspire.

transform through technology with InterWrite™ iPanel.

15" LCD Pen Input Display

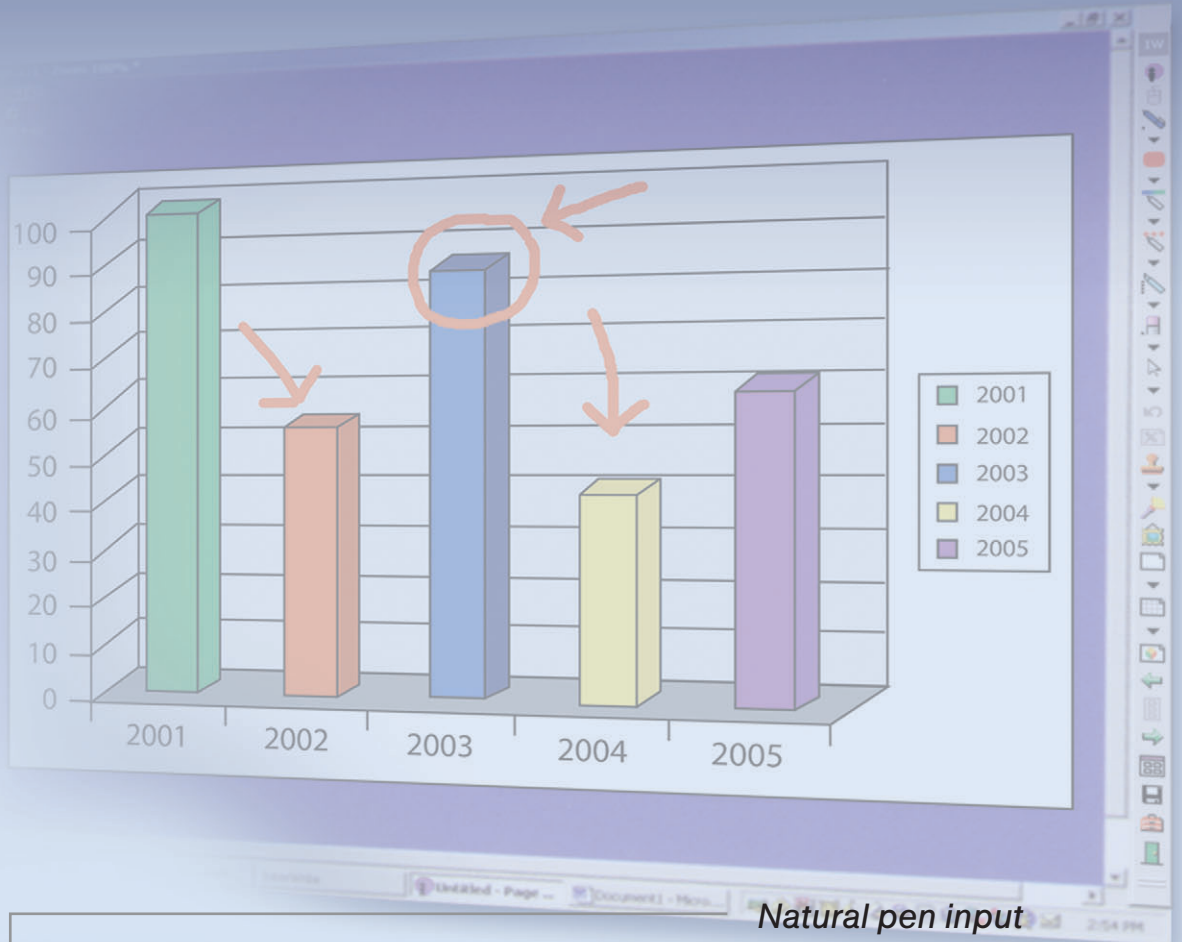

Natural pen input

Annotate key points with InterWrite software

Engage your audience

Control any application

Use on a podium or at your desk

interwrite™
iPanel

InterWrite™ iPanel

15" LCD Pen Input Display

The InterWrite™ iPanel combines the advantages of an LCD monitor with the simplicity of using a pen-input device. Whether you are a professor teaching a lesson from a podium or an executive delivering a presentation, the iPanel allows you to add annotations and life to your material while constantly facing your audience. The iPanel allows users to work directly on the 15" TFT display using a pen to control and annotate on top of any software application running on a connected computer. By connecting an LCD projector or other display, your audience can see your notes and presentation as you work. Like the rest of the InterWrite Suites of interactive products,



the iPanel includes the powerful yet intuitive InterWrite annotation software. Using the InterWrite Software, presenters or teachers can make annotations directly to the screen, highlight key points, import clipart, use a variety of included background templates, or even convert your hand-written notes to text. All of the notes, images, and annotations can be saved in a variety of formats, printed or e-mailed for action items, absent students or anyone else who may need to see them. The InterWrite iPanel can be used in conjunction with any of the InterWrite products including the InterWrite MeetingBoard, InterWrite SchoolBoard, InterWrite MeetingPad and InterWrite SchoolPad.

Included with your purchase:

- InterWrite iPanel Display
- 2 iPanel Executive 2-button pens
- USB Cable
- VGA Cable
- Power Supply
- InterWrite Software

Specifications

Platform Support	Windows 98/2000/ME/XP Mac OS X	Viewing Angle	-60° - 60° H, -60° - 40° V
Screen Size	15"	I/O Connectors	DC power in VGA 15-pin D-sub (IN/OUT) USB Connector
Resolution	1024 x 768 (XGA)	Data Report Rate	125 reports/per second
Active Area	12" x 9" 304mm x 228mm	Dimensions	14.5" x 17" x 2" 370mm x 435mm x 52mm
Response Time	30ms	Weight	10.78 lbs 4.9 kg
Pressure Sensitivity	512 Levels	Operating Temperature	32°F-122°F (0°C-50°C)
Accuracy	+/-0.5mm	Storage Temperature	-4°F-140°F (-20°C-60°C)
Pixel Pitch	0.012" x 0.012" 0.297mm x 0.297mm	Power Supply	AC100-240V Universal
Incline	20° - 80°	Warranty	One year
Number of Colors	16.7 Million		
Contrast Ratio	300:1		
Brightness	200 (cd/m2)		

Corporate Headquarters
7125 Riverwood Drive
Columbia, MD 21046
Toll-Free: 800.344.4723
Phone: 410.381.6688
Fax: 410.290.9065

Western Office
14555 North 82nd Street
Scottsdale, AZ 85260
Toll-Free: 800.856.0732
Phone: 480.948.6540
Fax: 480.948.5508

European Headquarters
GTCO CalComp, GmbH
Kreiller Strasse 24
81673 Muenchen, Germany
Phone: + 49 89 3700120
Fax: + 49 89 37001212

GTCO CalComp
PERIPHERALS
www.gtcocalcomp.com